

New !!

Ring Pump®

RP-K II Series For "Fixed Flow Rate" Pump System



Features

- Simple design and tough pump.
- You can select fixed flow rate from 5mL to 150 mL and select tubing from 3 kinds of materials.


Examples of application

Automatic washing machine, Electrolytic water conditioner, Air pressure adjuster, Automatic car washer and many other applications for detergent supply etc.


Main specifications

Flow rate	Max. 150mL / 5mL - Step
Tubing	Silicone/ Norprene/ TM-15
Motor/Power source	DC 24V
Material of main parts	Base : Iron Case : PP
Weight (for reference)	Approx. 415g

【Outline view】

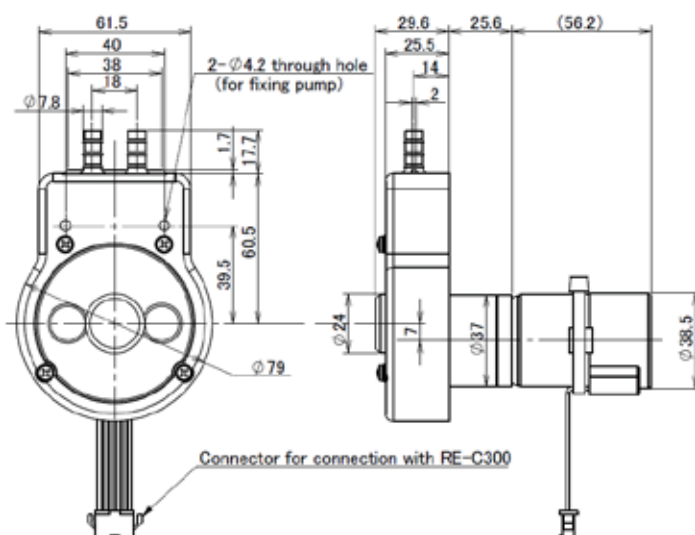

【Mounting plate view】

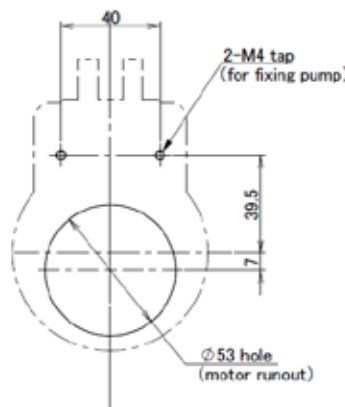

【Flow direction】



Be sure that the motor shaft position is horizontal.

Model Lineup

Model Lineup	Voltage (DC/V)	Flow rate (Max. mL)	Tubing		Product name of Pump system
			Type	ID x OD (mm)	
RP-K II 05S-150A-DC24VE	24	150	Silicone (S)	4.8 x 8.0	RE-C300-K II 05S
RP-K II 05N-150A-DC24VE	24	150	Norprene (N)	4.76 x 7.94	RE-C300-K II 05N
RP-K II 05W-150A-DC24VE	24	150	TM-15 (W)	4.8 x 7.9	RE-C300-K II 05W

Motor controller RE-C300



Display panel of PC software

