

New !!

Ring Pump®

RP-M Series

For "Fixed Flow Rate" Pump System



Features

- For wide and general purpose usage, being a standard product with a proven sales track record.
- Tubing can be selected from 3 kinds of materials.


Examples of application

Automatic washing machine, Electrolytic water conditioner, Air pressure adjuster, Automatic car washer and many other applications for detergent supply etc.


Main specifications

Flow rate	Max. 25mL / 1mL - Step
Tubing	Silicone/Pharmed/TM-15
Motor/Power source	DC 24V
Material of main parts	Base : ABS Cover : PP
Weight (for reference)	Approx. 355g


【Outline view】

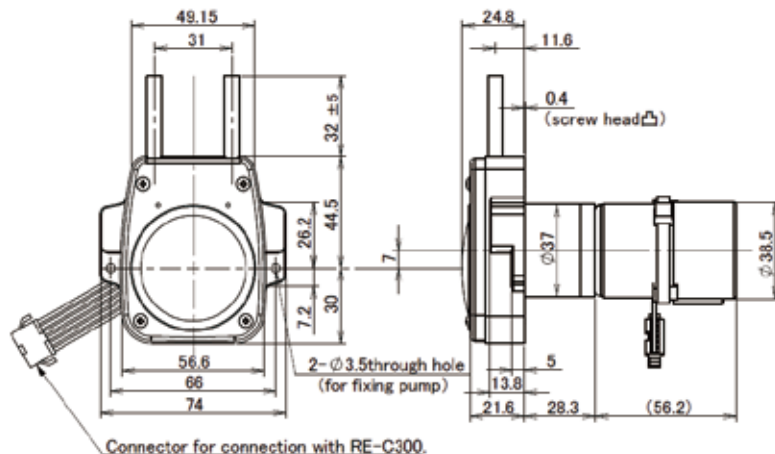

【Mounting plate view】

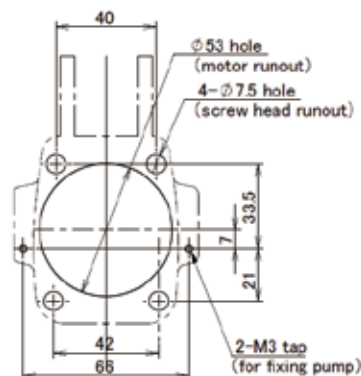

【Flow direction】



Be sure that the motor shaft position is horizontal.

Model Lineup

Model Lineup	Voltage (DC/V)	Flow rate (Max. mL)	Tubing		Product name of Pump system
			Type	ID x OD (mm)	
RP-M02S-25A-DC24VE	24	25	Silicone (S)	2 x 4	RE-C300-M02S
RP-M02F-25A-DC24VE	24	25	PharMed (F)	2 x 4	RE-C300-M02F
RP-M02W-25A-DC24VE	24	25	TM-15 (W)	2 x 4	RE-C300-M02W

Motor controller RE-C300



Display panel of PC software

